


Model		0.5	1	3	5	8	10	20	25	50	80
Square Drive		1/2"	3/4"	1"	1 1/2"	1 1/2"	1 1/2"	2 1/2"	2 1/2"	2 1/2"	3 1/2"
Min Torque	Ft-lbs	55	200	480	835	1200	1755	2960	3960	7875	10000
	Nm	75	271	651	1132	1627	2379	4013	5368	10675	13600
Max Torque	Ft-lbs	397	1340	3230	5590	8000	11520	19760	25890	52500	80000
	Nm	538	1817	4379	7578	10845	15617	26787	35096	71169	108800
Weight	Lbs	0.8	3.8	7.8	15	23	26.8	36	62	96	225
	Kg	0.4	1.9	3.9	7.5	11.5	13.4	18	31	48	112.5
L1	inch	3.15	4.68	6.04	7.21	7.85	9	10.2	12	15.2	19.62
	mm	81	120	155	185	202	232	259	310	390	498
L2	inch	4.87	7.13	9.24	11.23	12.49	13.9	16.55	18.4	23.9	19.62
	mm	125	183	237	288	321	357	420	473	615	498
H1	inch	2.35	3.52	4.68	5.63	6.42	7.2	8.5	9.1	11.4	15.4
	mm	60.5	90.5	120	144.5	164.61	186	216	234	294	391
H2	inch	3.62	4.75	6.08	7.05	8.4	9.3	9.9	11	13.4	18.9
	mm	93	122	156	181	213.36	239	251	282	344	480
R1	inch	0.52	0.9	1.28	1.44	1.62	1.87	2.17	2.37	3.8	4.0
	mm	13.5	23	33	37	41	48	55.11	61	79	101.6
W1	inch	1.3	1.95	2.59	3.12	3.48	3.9	4.7	5.2	6.5	6.8
	mm	33.5	50	66.5	80	88	100	119	134	167	173
W2	inch	1.97	2.76	3.72	4.9	4.95	5.5	6.7	7.4	8.9	9.5
	mm	50.5	71	95.5	126	126	142.5	170	191	228	241

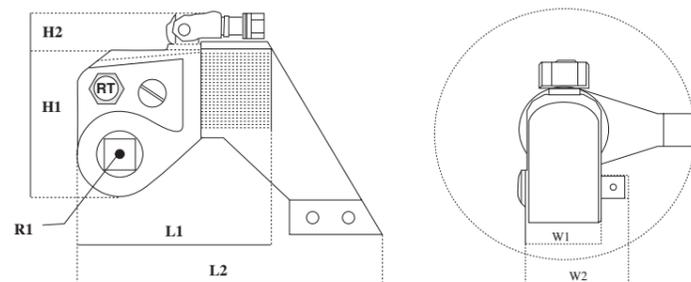

Rapid-Torc's Square Drive RT range are used globally on a daily basis, in industries ranging from offshore and steel production to open cast mining and chemical production. This is testament to the product's vast success.

The RT range of Square Drive torque wrenches combine many essential elements with quality and performance features, to ensure that the product delivers repeatable results in both tightening and loosening threaded connectors, whenever necessary. The Square Drive range is designed to be used in connection with any good quality Impact Socket and has a torque ratio that makes it another Rapid-Torc world leader.

The range is equipped with a 360 x 180 degree uni-swivel, to eliminate the possibility of hose kinking and allow its application in even, highly confined areas.

Used in conjunction with our variety of 10,000PSI pump units as well as our complete range of Impact Sockets, our Square Drive series is considerably more effective than all other Square Drive Hydraulic Wrenches in circulation.

Special Features

- Models from 55Ft/Lbs to 80,000Ft/Lbs
- Square Drive: Splined from 1/2" to 3 1/2"
- Ratcheting System: One-Way Lock/Unlock
- Double Acting Operation
- 60 point Adjustable Reaction Arm
- Unique Drive Retainer: DRIVE-LOCK
- 306 x 180 Degree Uni-swivel
- Exceptional ratio torque/weight
- Small radius for "easy fit"
- Housing made from highest quality aluminium alloy
- Output accuracy certified at +/- 3%
- CE approved



HTL Head Office
Unit 4 Coniston Court
Blyth Riverside Business Park
Blyth
Northumberland
NE24 4RP

T: 08000 832 202
F: 08000 832 203
W: www.hiretorque.co.uk

HTL Aberdeen Branch
Unit 4a Wellheads Crescent
Dyce Industrial Park
Dyce
Aberdeen
AB21 7GD

T: 01224 728 820
F: 01224 728 822
E: aberdeen@hiretorque.co.uk



**SALES • RENTAL • REPAIR • SERVICE
CALIBRATION • CERTIFICATION • TRAINING**
**SUPPLYING MAINTENANCE EQUIPMENT
ACROSS THE UK & BEYOND...**
24 HOURS A DAY • 7 DAYS A WEEK
365 DAYS A YEAR

FREEPHONE:
08000 832 202
www.hiretorque.co.uk